


AIMB-270

Intel® Core™ i7/i5/Celeron uFC-PGA989 Mini-ITX
with VGA/2DVI/LVDS, 6 COM, Dual LAN, PCIe x16

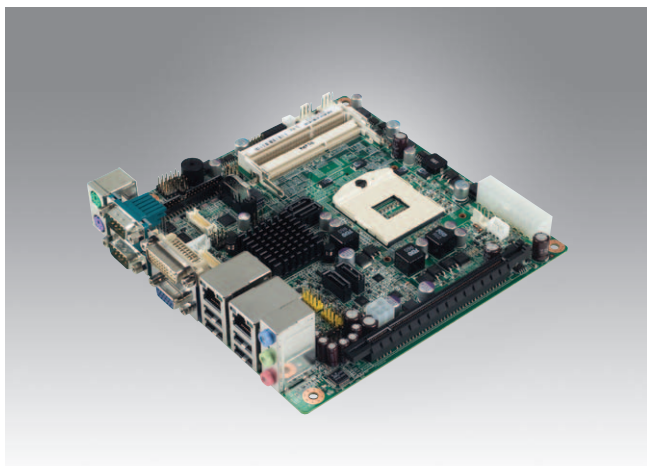

Features

- Supports Intel® Core™ i7 and i5 mobile processor (PGA) with Intel QM57 chipset
- Supports dual display of 2 DVI, LVDS, and VGA
- Supports PCIe x16 (Gen 2) and mini PCIe
- Supports, AMT6.0 and software RAID 0, 1, 5, 10
- Supports embedded software APIs and Utilities

Software APIs:



Utilities:




Note: eSOS requires ODM BIOS, available by request

Specifications

Processor System	CPU	Intel Core i7	Core i5	Intel Celeron
	Max. Speed	2.66 GHz	2.4 GHz	1.86 GHz
	DMI/FDI	DMI/FDI		
	L2 Cache	4 MB	3 MB	2 MB
	Chipset	Intel 5 series Chipset (QM57)		
Expansion Slot	BIOS	AMI EFI 64 Mbit SPI		
	PCI	-		
	Mini-PCIe	1		
Memory	PCIe x16 (Gen2)	8 GB/s per direction, 1 slot		
	Technology	DDR3 800/1066 MHz SDRAM		
	Max. Capacity	8 GB		
Graphics	Socket	2x 204 PIN DDR3 Socket		
	Controller	Integrated Gfx Gen5.75, supports DirectX 10 and OpenGL 2.1		
	VRAM	1GB maximum shared memory with 2GB and above system memory installed		
	VGA	Yes, supports max. resolution 2048 x 1536		
	LVDS	Single channel 18/24-bit/Dual channel 36/48-bit LVDS, supports max resolution 1920 x 1200		
	1st DVI	Yes, supports max. resolution 1920 x 1200		
	2nd DVI	Yes, with internal pin header, supports max. resolution 1920 x 1200		
Ethernet	Dual Display	CRT+LVDS, CRT+DVI, LVDS+DVI		
	Interface	10/100/1000 Mbps		
	Controller	GbE LAN1: Intel 82577LM, LAN2: Intel 82583V		
SATA	Connector	RJ-45 x 2		
	Max Data Transfer Rate	300 MB/s		
Rear I/O	Channel	4		
	VGA	1		
	DVI	1		
	Ethernet	2		
	USB	4 (USB 2.0 compliant)		
	Audio	3 (Mic-in, Line-out, Line-in)		
	Serial	2 (RS-232)		
Internal Connector	PS/2	2 (1 x keyboard and 1 x mouse)		
	USB	4 (USB 2.0 compliant)		
	LVDS/inverter	1		
	2nd DVI	1		
	Serial	4 (RS-232)		
	IDE	-		
	SATA	4		
	Mini-PCIe	1		
	Parallel	-		
	IrDA	-		
Watchdog Timer	GPIO	8-bit		
	Output	System reset		
Power Requirements	Interval	Programmable 1 ~ 255 sec/min		
	Power On	5 V	3.3 V	12 V
		3.42 A	1.1 A	5 Vsb
Environment				-12 V
				0.5 A
Physical Characteristics				0.07A
	Operating	Non-Operating		
	Temperature	0 ~ 60° C (32 ~ 140° F), depends on CPU speed and cooler solution		
		-20 ~ 70° C (-4 ~ 158° F)		
Physical Characteristics	Dimensions	170 mm x 170 mm (6.69" x 6.69")		

Board Diagram

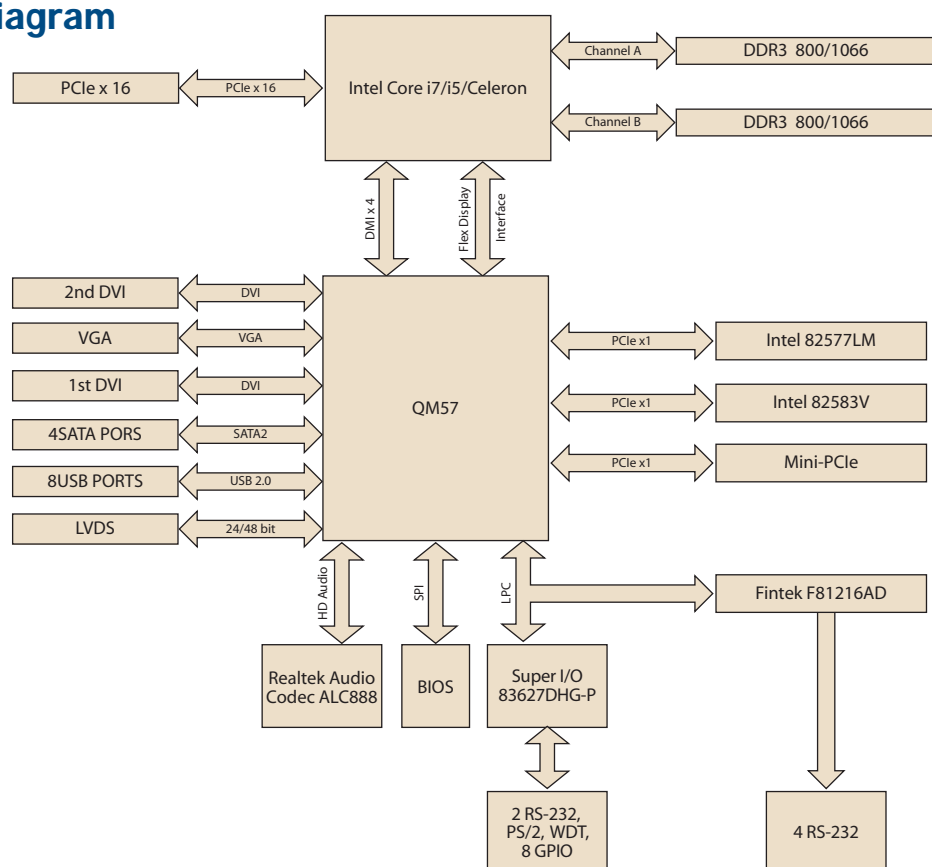

Ordering Information

Part Number	VGA	2 DVI	GbE LAN	COM
AIMB-270G2-00A1E	Yes	Yes	2	6

Packing List

Part Number	Description	Quantity
1700003194	SATA HDD cable	2
1703150102	SATA power cable	2
1960051292N001	CPU cooler	1
1701400181	Cable kit for 4 serial ports	1
1960019193T100	I/O port bracket	1
20060270010	Startup manual	1
20660270000	Driver CD	1

Optional Accessories

Part Number	Description
1700003195	USB cable with four ports, 17.5 cm
1700002204	USB cable with four ports, 27 cm
1700008461	USB cable with four ports, 30.5 cm
1700008822	DVI cable

Embedded OS/API

OS/API	Part No.	Description
Win XPE	2070009655	XPE WES2009 QM57 AIMB-270 V4.0 ENG
	2070009656	XPE WES2009 QM57 AIMB-270 V4.0 MUI24
Software API	205E270001	SUSI 3.0 SW API for AIMB-270 XP

I/O View



AIMB-270G2-00A1E

Value-Added Software Services

Software API: An interface that defines the ways by which an application program may request services from libraries and/or operating systems. Provides not only the underlying drivers required but also a rich set of user-friendly, intelligent and integrated interfaces, which speeds development, enhances security and offers add-on value for Advantech platforms. It plays the role of catalyst between developer and solution, and makes Advantech embedded platforms easier and simpler to adopt and operate with customer applications.

Software APIs

Control



GPIO

General Purpose Input/Output is a flexible parallel interface that allows a variety of custom connections. It allows users to monitor the level of signal input or set the output status to switch on/off a device. Our API also provides Programmable GPIO, which allows developers to dynamically set the GPIO input or output status.



SMBus

SMBus is the System Management Bus defined by Intel® Corporation in 1995. It is used in personal computers and servers for low-speed system management communications. The SMBus API allows a developer to interface a embedded system environment and transfer serial messages using the SMBus protocols, allowing multiple simultaneous device control.



I2C

I2C is a bi-directional two wire bus that was developed by Philips for use in their televisions in the 1980s. The I2C API allows a developer to interface with an embedded system environment and transfer serial messages using the I2C protocols, allowing multiple simultaneous device control.

Display



Brightness Control

The Brightness Control API allows a developer to interface with an embedded device to easily control brightness.



Backlight

The Backlight API allows a developer to control the backlight (screen) on/off in an embedded device.

Monitor



Watchdog

A watchdog timer (WDT) is a device that performs a specific operation after a certain period of time if something goes wrong and the system does not recover on its own. A watchdog timer can be programmed to perform a warm boot (restarting the system) after a certain number of seconds.



Hardware Monitor

The Hardware Monitor (HWM) API is a system health supervision API that inspects certain condition indexes, such as fan speed, temperature and voltage.



Hardware Control

The Hardware Control API allows developers to set the PWM (Pulse Width Modulation) value to adjust fan speed or other devices; it can also be used to adjust the LCD brightness.

Power Saving



CPU Speed


Make use of Intel SpeedStep technology to reduce power consumption. The system will automatically adjust the CPU Speed depending on system loading.



System Throttling

Refers to a series of methods for reducing power consumption in computers by lowering the clock frequency. These APIs allow the user to lower the clock from 87.5% to 12.5%.

Software Utilities



BIOS Flash

The BIOS Flash utility allows customers to update the flash ROM BIOS version, or use it to back up current BIOS by copying it from the flash chip to a file on customers' disk. The BIOS Flash utility also provides a command line version and API for fast implementation into customized applications.



Embedded Security ID

The embedded application is the most important property of a system integrator. It contains valuable intellectual property, design knowledge and innovation, but it is easily copied! The Embedded Security ID utility provides reliable security functions for customers to secure their application data within embedded BIOS.



Monitoring

The Monitoring utility allows the customer to monitor system health, including voltage, CPU and system temperature and fan speed. These items are important to a device; if critical errors happen and are not solved immediately, permanent damage may be caused.



eSOS

The eSOS is a small OS stored in BIOS ROM. It will boot up in case of a main OS crash. It will diagnose the hardware status, and then send an e-mail to a designated administrator. The eSOS also provides remote connection: Telnet server and FTP server, allowing the administrator to rescue the system.



Flash Lock

Flash Lock is a mechanism that binds the board and CF card (SQFlash) together. The user can "Lock" SQFlash via the Flash Lock function and "Unlock" it via BIOS while booting. A locked SQFlash cannot be read by any card reader or boot from other platforms without a BIOS with the "Unlock" feature.