

PPC-412

12.1" Fanless Panel PC with Intel® Core™ i5-7300U Processor



Features

- 12.1" XGA TFT LCD with resistive touchscreen
- Intel® Core™ i5-7300U(default); i7-7600U/i3-7100U(optional) processor with fanless system design
- 1 x isolated RS-422/485 with auto flow
- Wide input power range (9 ~ 32 V_{DC})
- Dual Gigabit Ethernet with IEEE1588 support
- 3 x Independent displays
- 1 x M.2 bay (2242) for storage only
- 1 x TPM 2.0 internal support (optional)
- Supports VESA 75 mounting interface

Introduction


PPC-412 is a new generation industrial interactive panel PC with a 12.1" TFT LCD 1024 x 768 resolution, which features a flat, sleek design to greatly reduce maintenance effort. Pre-installed Intel® Core™ i processor and designed fanless architecture, PPC-412 provide high performance and reliable system for factory automation or variety of industrial applications. Furthermore, with the provision of multiple I/O, dual Intel® Gigabit ethernet, PPC-412 ensures easy integration and connectivity.

Specifications

System	CPU	Intel® Core™ i5-7300U dual core (default); i7-7600U/i3-7100U (optional)
	Frequency	2.6 GHz, up to 3.5 GHz with turbo
	L2 Cache	3 MB
	Memory	1 x SODIMM DDR4 1866/2133 MHz, (max. 16 GB)
	Storage	1 x 2.5" SATA bay 1 x M.2 bay (size: 22 x 42 mm, socket 2 B key, for storage only)
	Network (LAN)	2 x 10/100/1000 Mbps Ethernet (Intel® I211-AT; Intel® I219LM)
	I/O	3 x RS-232, 1 x RS-422/485 with 1K V _{DC} isolation 4 x USB 3.0 1 x Line-out, 1 x Mic-in 1 x DB15 VGA 1 x Display Port (1.2) 1 x TPM 2.0 internal(optional)
	Expansion	1 x Mini PCIe
	Watchdog Timer	255 timer levels, set up by software
	Speaker	2 x 1W
Physical Characteristics	Dimensions	317 x 246 x 60.5 mm (12.4 x 9.7 x 2.4 in)
	Weight	3.4 kg (7.5 lb)
OS Support	OS Support	Microsoft® Windows 10 (64-bit), Win 10 LTSC, Linux
Power Consumption	Input Voltage	9 ~ 32 V _{DC}
	Power Consumption	i5-7300U 60W (Burn-in test 8.0 in Windows 10 64bit)
LCD	Display Type	12.1" TFT LCD panel
	Max. Resolution	1024 x 768
	Viewing Angle	89 (left), 89 (right), 89 (up), 89 (down)
	Luminance (cd/m ²)	600
	Contrast Ratio	1000
	Backlight Lifetime	50,000 hr (min.)
Touchscreen	Touch Type	5-wire resistive
	Light Transmission	80±5% at 550nm wavelength
	Controller	USB interface
Environment	Operating Temperature	0 ~ 50 °C (32 ~ 122 °F) with SSD
	Storage Temperature	-20 ~ 60 °C (-4 ~ 140 °F)
	Relative Humidity	10 ~ 95% @ 40 °C (Non-Condensing)
	Shock	Operating 10 G Peak Acceleration (11 ms Duration), Follows IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5 ~ 500Hz, 2Grms @with SSD, Follows IEC 60068-2-64
	EMC	CE, FCC Class B, BSMI
	Safety	CB, UL, CCC, BSMI
Front Panel Protection	IP65 compliant	

Dimensions

Unit: mm

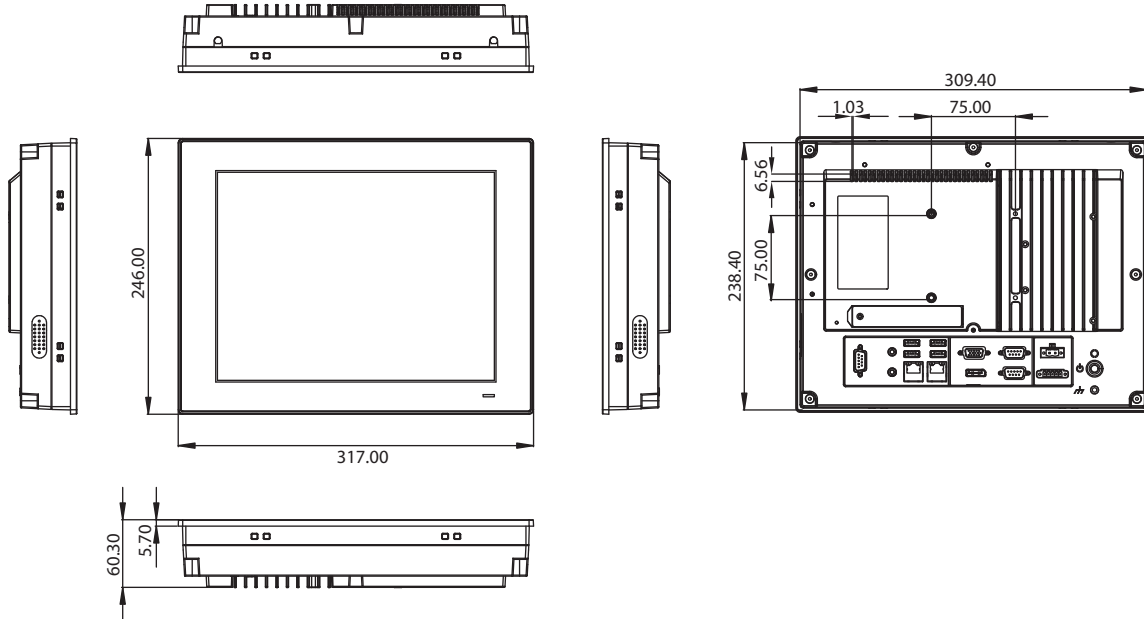


Cut-Out Dimension: 311 x 240 mm

Ordering Information

Part Number	Description
PPC-412-R750A	Intel Core i5-7300U Fanless PPC with 12.1" XGA LED backlight, resistive touch, assembled in China
PPC-412-R750AO	Intel Core i5-7300U Fanless PPC with 12.1" XGA LED backlight, resistive touch, without audio function, assembled in China
PPC-412-R750AU	Intel Core i5-7300U Fanless PPC with 12.1" XGA LED backlight, resistive touch, assembled in Taiwan
96PSA-A90W190T-3	A/D 100-240V 90W 19V C6 TERMINAL 2 PIN 62368
1700001524	POWER Cord 3P UL 10A 125V 180cm
170203183C	POWER Code 3P Europe (WS-010+083)183cm
1700008921	POWER CORD 3P/3P POWER SUPPLY 1.8M PSE
96CB-POWER-B-1.8MB	Power code 3P CCC(China) 1.8M
PPC-174T-WL-MTE	Wall mount kit for PPC series
PPC-STAND-A1E	Stand for PPC series
PPC-ARM-A03	ARM VESA Standard (A-CLEVER) for PPC series
PPC-WLAN-C1E	M.2 Wi-Fi Module with Antenna cable support 2T2R
98R3P321110	TPM 2.0 module

I/O View

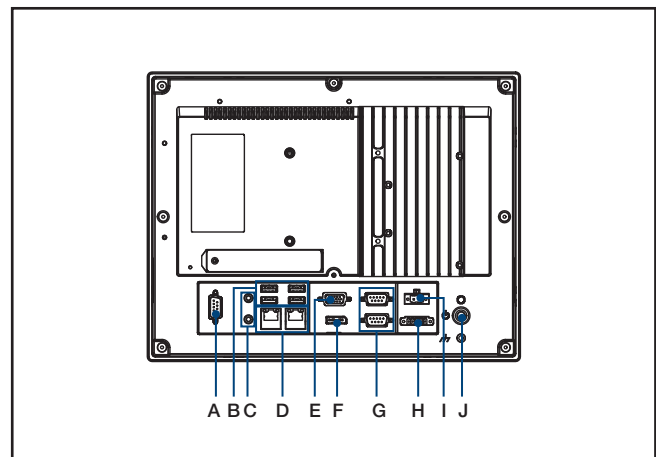

- A. 1 x RS-232
- B. 4 x USB3.0
- C. 1 x Mic-In/Line-Out
- D. 2 x Intel Gigabit Ethernet
- E. 1 x VGA
- F. 1 x DisplayPort
- G. 2 x RS-232
- H. 1 x Isolated RS-422/485
- I. 1 x DC inlet and AT/ATX switch
- J. 1 x Power button

Please note: If some optional modules are offered with the system, additional system certificates may be required in certain regions/countries. Please contact Advantech for certificate compliance.